

10 combined tally counter with automatic recording function

# DK-5010C<sup>⌚</sup>

## At a preset interval

(1 minute to 99 hours 59 minutes)




# Count Values are recorded automatically

The individual count values and the total count are recorded automatically at a preset interval with a corresponding timestamp.

Whether the count values are reset to "0" or not after saving a data log is selectable.

Useful at  
production sites

Useful at  
various  
statistical surveys

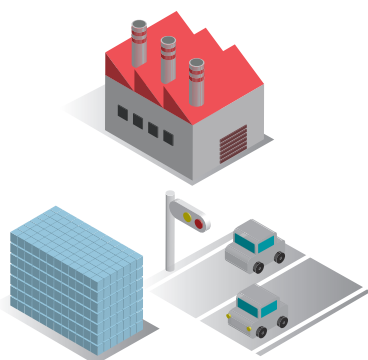

### DK-5000 Mieruzzo Software

Setting : Log Interval = "1 hour",  
Logging Type = "Continuous"

Present	2015-04-02 00:00:00	2015-04-03 00:00:00	2015-04-04 00:00:00		
	<b>Timestamp</b>	<b>Total</b>	<b>Counter1</b>	<b>Counter2</b>	<b>Counter3</b>
1	2015-04-01 08:00:00	0	0	0	0
2	2015-04-01 09:00:00	15	5	5	0
3	2015-04-01 10:00:00	25	8	10	0
4	2015-04-01 11:00:00	55	13	25	3
5	2015-04-01 12:00:00	80	18	35	12
6	2015-04-01 13:00:00	103	35	40	15
7	2015-04-01 14:00:00	115	38	43	15
8	2015-04-01 15:00:00	160	45	55	25
9	2015-04-01 16:00:00	205	50	62	30
10	2015-04-01 17:00:00	255	60	72	50
11	2015-04-01 18:00:00	350	102	82	70
12	2015-04-01 19:00:00	375	107	84	71
13	2015-04-01 20:00:00	380	107	86	72
14	2015-04-01 21:00:00	395	110	89	75
15	2015-04-01 22:00:00	420	113	95	75
16	2015-04-01 23:00:00	445	120	102	78
17	2015-04-02 00:00:00	478	128	110	80


Start Time : 2015-04-01 08:00:00  
End Time : 2015-04-02 00:00:00  
Number of Logs : 17

Export Record




## Applications

### [Traffic Survey]

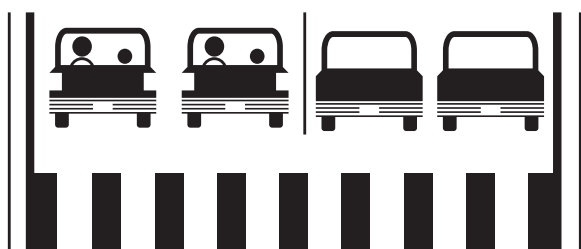

The buttons are assigned to each type of vehicle for counting passing vehicles. The count values are recorded automatically at a preset interval.

### [At various events, shops, facilities and etc.]

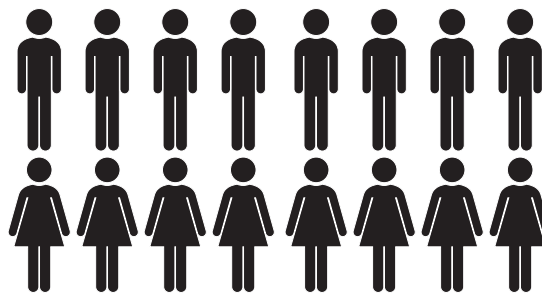

The number of visitors are counted per each age and gender. The count values are recorded automatically at a preset interval.

## Unique features of DK-5010C


1. The individual count values and the total count are recorded automatically at a preset interval with a corresponding timestamp.
2. Date & Time is recorded when count values are recorded in its memory so that you can review them as time series data later.
3. It is easy to accumulate and edit with spreadsheet software in the case the count values are saved on the computer.

## Software Windows computer is required to view record details.


The companion software enables the user to use the following functions when the device is connected to the computer with a general-purpose USB cable.

- Real-time display of count values displayed on the device
- Download the data from the device
- Export the downloaded data to a .XLS or .CSV file

### Display of software

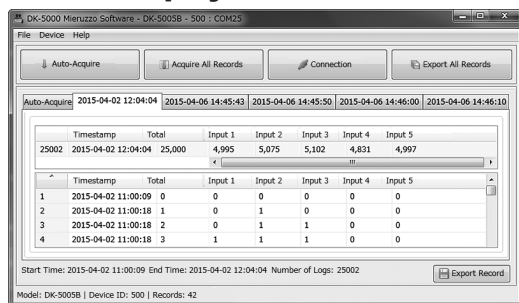

## Dimensions (mm)

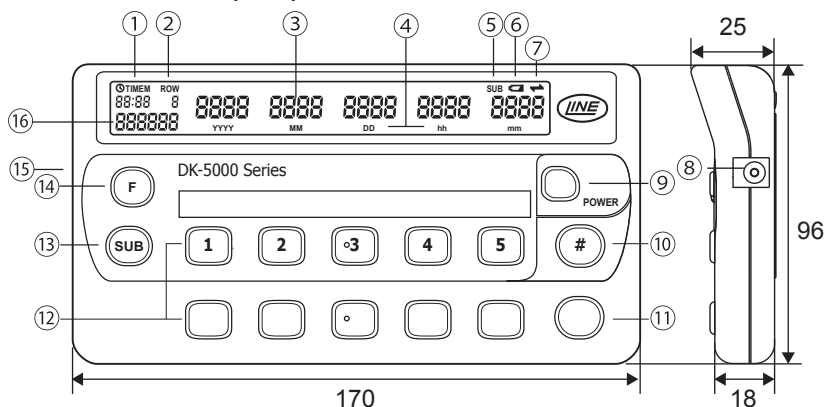

- ① Clock / Memory Display
- ② Row Display
- ③ Count Display
- ④ Date/Time Icon
- ⑤ Subtract Icon
- ⑥ Low Battery Icon
- ⑦ Software Link Icon
- ⑧ 5.5 mm DC Jack
- ⑨ Power Key
- ⑩ [#] Key
- ⑪ Row Key
- ⑫ Count Key
- ⑬ Subtract Key
- ⑭ Function Key
- ⑮ USB 2.0 Port
- ⑯ Total Count Display

## Specifications

<b>Input Type</b>	Rubber Key
<b>Display Type</b>	7-Segment LCD Display Counter (x5) : 7mm(H), Total Count : 5mm(H) Record Number / Time Display : 3.5mm(H)
<b>Count Display</b>	Internal : 0 - 99999(Display : 0 - 9999)
<b>Total Count Display</b>	0 - 999999
<b>Clock Function</b>	Year / Month / Day / Hour(24hour) / Minute / Second
<b>Memory</b>	Maximum number of log recorded automatically: 27,750 logs (Built-in flash memory)
<b>Data Communication</b>	USB micro-B (USB 2.0)
<b>Power Source</b>	AAA Battery x 4 pcs.   USB Cable   AC/DC Adapter
<b>Battery Life</b>	200 hour min. *
<b>Operating Temperature</b>	0°C - +50°C (non-freezing)
<b>Storage Temperature</b>	-10°C - +60°C (non-freezing)
<b>Weight</b>	Approx. 185g (battery & accessories not included)

\* (under normal operating temperature using Alkaline type battery)

### Accessories

Instruction Manual

\* Batteries are not included.

Please prepare AAA batteries by yourself.

### Data Communication Software

Downloadable from

<http://www.lineseiki.com>

### Options

#### USB-02 (USB Cable)

\* A general-purpose micro B-to-A USB cable can be used.

#### AC/DC ADAPTER (DK-5)

\* Please use Line Seiki AC/DC Power Adapter.

This catalog was last revised July 29, 2015.  
Contents are subject to change even without prior notice.  
All Rights Reserved, Copyright © 2015, LINE SEIKI CO., LTD.



**LINE SEIKI CO., LTD.**

Head Office 37-7 Chuo-cho, 2-Chome Meguro-ku,  
Tokyo JAPAN 152-0001

Contact  
E-mail  
URL

TEL:03-3716-5151  
webtrade@line.co.jp  
<http://www.lineseiki.com>

FAX:03-3710-4552