



DIGITAL TACHOMETER **TM-7000**



TM-7000K (KIT Type) Inclusion

- ◆ TM-7000 main unit
- ◆ In-Contact Adapter
- ◆ Reflective Tapes, 10 sheets
- ◆ Rubber Tips, 3 pieces
- ◆ Surface Speed Wheel
- ◆ AAA Alkaline Batteries, 4 pieces
- ◆ Instruction Manual (English)
- ◆ Leather Carrying Case





FEATURES

- ◆ Through adoption of laser technology non-contact measurement performance has improved.
- ◆ Highly visible laser makes measurement adjustments easy.
- ◆ Measuring distance up to 1 meter from a reflective target.
- ◆ 6.0 ~ 99999.9 rev/min measuring range and 0.1 rev/min resolution.
- ◆ Contact measurement with In-Contact adaptor.
- ◆ Rotational Speed measurement and Linear / Surface Speed measurement.
- ◆ In conformance to **CE** and **RoHS**.

TAKE MEASUREMENTS with EASE through **LASER**!

● COMPONENTS

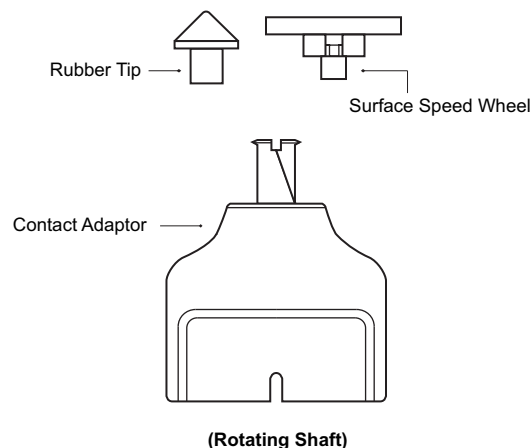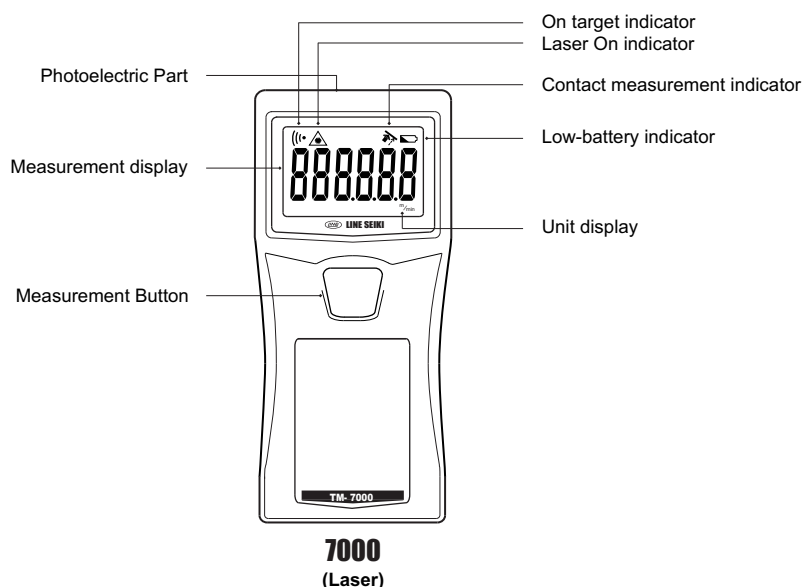

● SPECIFICATIONS

Model	TM-7000
Measuring Range (Non-Contact)	6.0 ~ 99999.9 r/min
Measuring Range (Contact)	6.0 ~ 15000.0 r/min
Resolution	0.1 r/min
Accuracy	±0.01% ±1 digit
Sampling Time	1.0 ~ 10.0 seconds (1.0 ~ 2.0 seconds, with contact adaptor)
Measuring Method	Non-contact measurement using the main unit (use with reflective tape) Contact measurement using the in-contact adaptor (use with rubber tip or surface speed wheel)
Measuring Distance	50 mm ~ 1000 mm from a reflective target
Display	Display : 6 digits, 7 segment LCD (Blue Backlight) Low-battery : mark On target : mark Laser On : mark Contact Measurement : mark
	Display Unit : /min
Auto-Power Off	After 3 minutes from last measurement or key operation
Data Hold Time	Measurement Data : Until the next data is defined
Optical System	Light Source : Laser, Class 2
	Operating Range : 50 ~ 1000 mm, ±40° angle
	Wavelength : 650 nm, CW
	Power Output : Max. 1mW
Power Supply	4 pieces of AAA alkaline battery (continuous measurement of 30 hours)
Operating & Storage Temperature	5°C ~ 40°C (operating), -10°C ~ 60°C Non-Freezing (storage)
Operating Humidity	35%RH ~ 85%RH (Non-Condensing)
Dimension & Weight	125(H) x 58(W) x 27.4(D) mm, 140g (batteries included)

Specifications are subject to change without prior notice.



LS INSTRUMENTATION

Address : Unit 2E, GLORIA Bldg., 157 A. Bonifacio Ave., Corner Pag-Asa & Agudo Sts., QC
 Contact : Tel : +62-2-7031895 (3677533)
 Fax : +63-2-3641942
 Mobile : +63-917-9296592
 E-mail : ls.instrumentation@gmail.com



LINE SEIKI CO., LTD.

Address : 37-7 Chuo-cho, 2-Chome Meguro-ku, Tokyo 152-0001 Japan
 Contact : Tel : +81-3-37165151
 Fax : +81-3-37104552
 E-mail : webtrade@line.co.jp
 Web : <http://www.lineiseiki.com>