

Standard Dial Gauges

JIS B 7503

0.001mm and 0.005mm

Dial Gauges are widely used manufacturing plants.

- The stem, made of SK quench hardened with strength, is malfunction-free due to fastening.
- The shock-proof mechanism prevents gears from damage due to shocks arisen by abruptly pushing up the spindle.
- The turning section of the outer frame sealed by the O-ring and the back inside sealed by the packing are water-proof and dust-proof in construction.
- The back is increased in strength by four screws, and the lug can be turned 90 degrees in the installation way.

<HG>

High Precision Type



5B-HG

Graduation: 0.001mm
Range: 1mm

- Indication error $\pm 3\mu\text{m}$
- Retrace error $2\mu\text{m}$
- Includes accuracy certification
- Lug back



5-DX

Graduation: 0.001mm
Range: 1mm

- Durable type (Spindle $\phi 5\text{mm}$)
- Lug back



5B

Graduation: 0.001mm
Range: 1mm

- Lug back



5F

Graduation: 0.001mm
Range: 1mm


- Flat back



5-SWF

Graduation: 0.001mm
Range: 1mm

- Oil-proof type
- Contact point (X-2A)
- Lug back

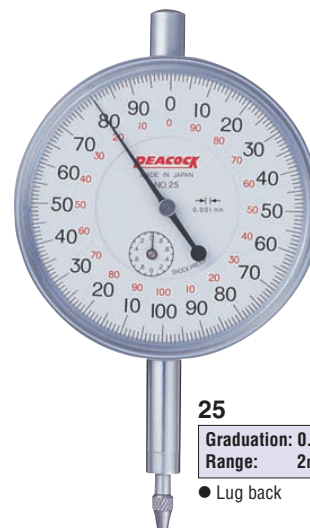

25

Graduation: 0.001mm
Range: 2mm

- Lug back

- Dial Gauge
- Dial Indicators
- Cylinder Gauge
- Dial Thickness Gauge
- Dial Caliper
- Depth Gauge
- Dial Inside Gauge
- Dial Hole Gauge